


## Technical data

# LINITHERM PGV Flex

Over-rafter Insulation system

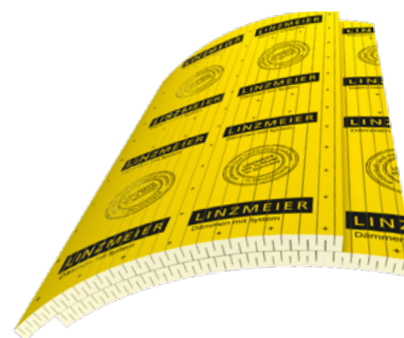

Property	Formula symbol	Unit	Parameter and measured value	Standard
Material	–	–	Polyurethane rigid foam, coated with mineral fleece on both sides, insulation element slotted on both sides	EN 13165
Application type	–	–	DAD, DAA dh or DZ	DIN 4108-10
Gross density	$\rho$	kg/m <sup>3</sup>	≥ approx. 33	–
Fire behaviour	–	–	Class E or normally inflammable	EN 13501-1
Thermal conductivity (D)	$\lambda_B$	W/(mK)	0.029 for panel thickness < 80 mm 0.027 for panel thickness ≥ 80	DIN 4108-4
Thermal conductivity (EU)	$\lambda_D$	W/(mK)	0.028 for panel thickness < 80 mm 0.026 for panel thickness ≥ 80	EN 13165
Compressive stress	$\sigma_{D10}$	N/mm <sup>2</sup> kPa	≥ 0.12 (at 10 % compression) ≥ 120	EN 826
Tensile strength perpendicular to the panel surface	$\sigma_{mt}$	N/mm <sup>2</sup> kPa	≥ 0.05 ≥ 50	EN 1607
Specific thermal capacity	c	J/(kg·K)	1400	EN 12524
Water vapour diffusion resistance	$\mu$	–	40/200	DIN 4108-4
Minimum radius	–	m	≥ 1.50	EN 12087
Resistance of polyurethane rigid foam	–	–	Chemically resistant to petrol, diesel mineral oil, micro-organisms, mould, rot-proof	–
Thickness grades	–	mm	60, 80, 120 (60 + 60), 140 (60 + 80), 160 (80 + 80)	–
Edge connection	–	–	Round about edgeless cut	–
Overlap	–	mm	2440 × 1200 (= calculation measurement)	–

Our brochures and information material are meant to provide advice to the best of our knowledge. Subject to technical modifications.



Declaration of Performance  
004-LICPR-200801  
[www.linzmeier.de/downloads](http://www.linzmeier.de/downloads)



DIN EN 13165  
Inspection: 0751 FIW München



pure life is a seal of approval issued by the USGPU association